FINO INDUSTRIES

CARGO SECURING PRODUCTS

PRODUCT CATALOG | OEM & PRIVATE LABEL



Contents

03	Round cords · four hook options
04	Molded hooks · four designs
05	17 mm flat bungee cords
06	Adjustable round cords
07	**Patented 4 arms adjustable bungee**
08	**Patented adjustable ball bungee**
09	Reusable twist ties
10	Bungee cargo nets
11	Jar-pack assortments
12–16	Ratchet tie-downs
17	E-track logistic straps
18–20	Automatic retractable tie-downs

ABOUT FINO INDUSTRIES

FINO INDUSTRIES focuses on practical cargo securing products for distributors and private-label buyers. Our current range centers on bungee cords and ratchet tie-downs, including standard configurations and selected adjustable designs.

We work with manufacturing partners to coordinate product specifications, samples, packaging and orders. Cord colors, lengths, hook options and retail presentation can be discussed to match your market. If you are sourcing related cargo products, tell us what you need and we can review the options together.

Round Cords · Hook Options





Single J





Double J





Pressed Carabiner





Tape-Wrapped

AVAILABLE SPECIFICATIONS

HOOK	SERIES CODE	CORD	LENGTH (CM)	HANG CARD
Single J	BC-R6-SJ	6 mm	45/60/80/100/120/150	2 pcs/set
Single J	BC-R8-SJ	8 mm	45/60/80/100/120/150	2 pcs/set
Single J	BC-R10-SJ	10 mm	45/60/80/100/120/150	2 pcs/set
Double J	BC-R6-DJ	6 mm	45/60/80/100/120/150	2 pcs/set
Double J	BC-R8-DJ	8 mm	45/60/80/100/120/150	2 pcs/set
Double J	BC-R10-DJ	10 mm	45/60/80/100/120/150	2 pcs/set
Pressed CH	BC-R6-CH-P	6 mm	45/60/80/100/120/150	2 pcs/set
Pressed CH	BC-R8-CH-P	8 mm	45/60/80/100/120/150	2 pcs/set
Pressed CH	BC-R10-CH-P	10 mm	45/60/80/100/120/150	2 pcs/set
Tape CH	BC-R6-CH-E	6 mm	45/60/80/100/120/150	2 pcs/set
Tape CH	BC-R8-CH-E	8 mm	45/60/80/100/120/150	2 pcs/set
Tape CH	BC-R10-CH-E	10 mm	45/60/80/100/120/150	2 pcs/set

8 mm Molded Hook Designs





DESIGN A

BC-R8-MH1





DESIGN B

BC-R8-MH2





DESIGN C

BC-R8-MH3





DESIGN D

BC-R8-MH4

AVAILABLE SPECIFICATIONS

SERIES CODE	CORD	LENGTH (CM)	STANDARD PACK
BC-R8-MH1	8 mm	45 / 60 / 80 / 100 / 120 / 150	2 pcs/set, hang card
BC-R8-MH2	8 mm	45 / 60 / 80 / 100 / 120 / 150	2 pcs/set, hang card
BC-R8-MH3	8 mm	45 / 60 / 80 / 100 / 120 / 150	2 pcs/set, hang card
BC-R8-MH4	8 mm	45 / 60 / 80 / 100 / 120 / 150	2 pcs/set, hang card

17 mm Flat Bungee Cords











DESIGN A · TWO VIEWS

DESIGN B

SERIES CODE	WIDTH	LENGTH (CM)	STANDARD PACK
BC-F17-A	17 mm	60 / 80 / 100 / 120	2 pcs/set, hang card
BC-F17-B	17 mm	60 / 80 / 100 / 120	2 pcs/set, hang card

Adjustable Round Cords

FEATURED RANGE



Molded Hook

BC-A8-MH-100





Carabiner Hook

BC-A8-CH-100





Multi-Function Hook

BC-A8-LH-100




SERIES CODE	CORD	LENGTH	STANDARD PACK
BC-A8-MH-100	8 mm	100 cm	2 pcs/set, color card
BC-A8-CH-100	8 mm	100 cm	2 pcs/set, color card
BC-A8-LH-100	8 mm	100 cm	2 pcs/set, color card

4-Arm Adjustable Bungee

PATENTED DESIGN





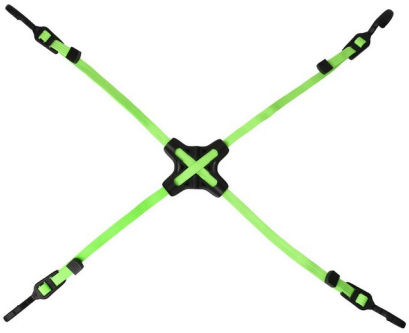

CORD COLORS OPTIONS



TPE center · 4 coated metal-core hooks · 2 x 100 cm flat cords · Dual End Adjustable

SERIES CODE	CORDS	ADJUSTABLE RANGE	PACK
BC-4A-HC-100	2 × 100 cm	38–183 cm	1 pc/set, hang card
BC-4A-CB-100	2 × 100 cm	38–183 cm	1 pc/set, color box

Adjustable Ball Bungees

PATENTED DESIGN





FUNCTION AND DETAILS · EXCLUSIVE ADJUSTABLE DESIGN





SERIES CODE	CORD	LENGTH	STANDARD PACK
BC-AB37-030	3.7 mm	30 cm	4 pcs/set, hang card

Multifunctional Reusable Twist Ties


REUSABLE TWIST TIES




FUNCTION AND DETAILS · SPECIAL & MULTIFUNCTIONAL DESIGN

SERIES CODE	CORD	LENGTH	STANDARD PACK
FITT-4 **FITT-6**	4 mm 6 mm	3–64 in / 7.6–162.6 cm	2 pcs/set, hang card

Bungee Cargo Nets

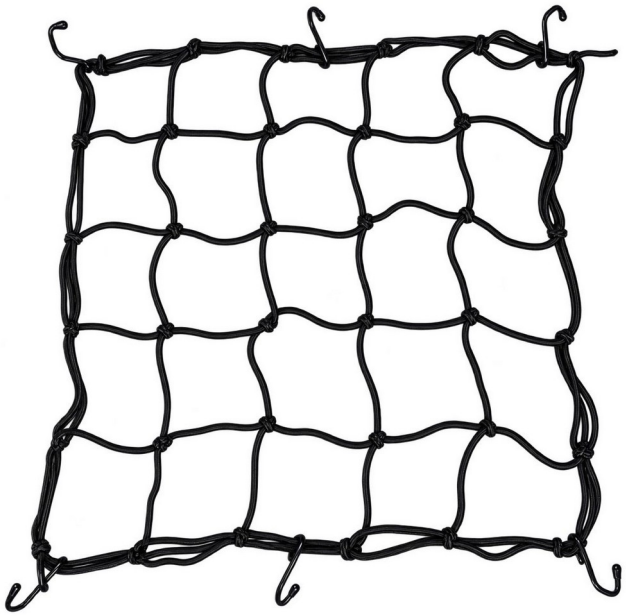

SINGLE J STEEL HOOK

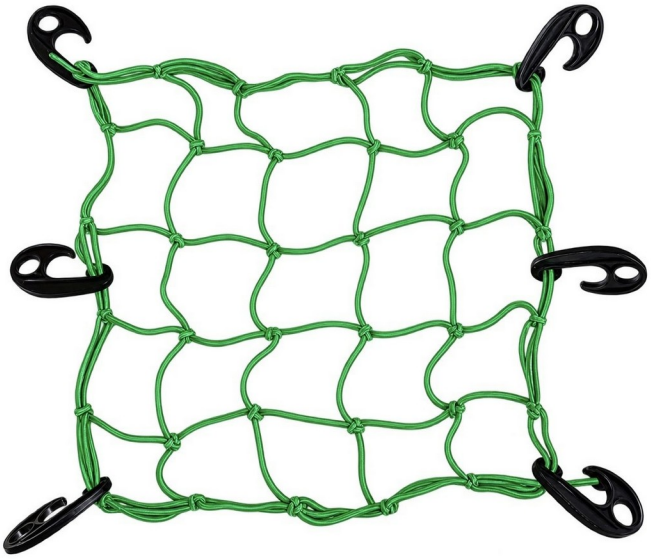

MOLDED HOOK

One net per pack. Select the required hook style when enquiring.

SERIES CODE	CORD	NET SIZE	STANDARD PACK
BC-N4-MH	4 mm	40 × 40 cm	1 pc/set
BC-N4-SJ	4 mm	40 × 40 cm	1 pc/set

Jar-Pack Assortments



10-PIECE · SINGLE LENGTH

BC-J10-100

10 × 8 mm × 100 cm

Tongue-style molded hooks



10-PIECE · TWO LENGTHS

BC-J10-80/100

5 × 8 mm × 80 cm + 5 × 8 mm × 100 cm

Regular molded hooks



12-PIECE · MIXED

BC-J12-MIX

8 mm × 46 / 60 / 76 / 90 cm: 2 each; 4 mm × 25 cm: 4

Steel single J hooks

25MM RATCHET STRAP

TD2501



- 25 mm high-tenacity polyester webbing
- Multiple ratchet handle designs
- Five hook options
- Custom length, color and packaging
- For cargo restraint applications

25 mm / 1 inch

LC 400 daN **BS 800 kg**

EN 12195-2

RATCHET BUCKLE OPTIONS



TD2502



TD2503



TD2504



TD2505



TD2506



TD2507



TD2508

HOOK OPTIONS

A



Hook A

B



Hook B

C



Hook C

D



Hook D

E



Hook E

PARAMETER SHEET

Item	Ratchet buckle type	Load capacity	Breaking strength	Standard
TD2501	Yellow zinc buckle	LC 400 daN	800 kg	EN 12195-2
TD2502	Moulded rubber handle	LC 400 daN	800 kg	EN 12195-2
TD2503	Moulded rubber handle	LC 400 daN	800 kg	EN 12195-2
TD2504	Moulded rubber handle	LC 400 daN	800 kg	EN 12195-2
TD2505	Moulded rubber handle	LC 400 daN	800 kg	EN 12195-2
TD2506	Moulded rubber handle	LC 400 daN	800 kg	EN 12195-2
TD2507	Black-painted buckle	LC 400 daN	800 kg	EN 12195-2
TD2508	Moulded rubber handle	LC 400 daN	800 kg	EN 12195-2

Other LC options available: LC 300 / 350 daN

Standard configuration: 25 mm polyester webbing. Hook, length, strap color, handle color and packaging can be customized.

DURABLE
Polyester webbing

VERSATILE
Ratchet and hook options

EASY TO USE
Fast tensioning and release

OEM / ODM
Custom colors and packaging

QUALITY
EN 12195-2 reference

27MM RATCHET TIE DOWN

TD2701

- High-strength polyester webbing
- High-quality hardware
- Easy-to-use
- Customized strap colors
- Designed for cargo restraint applications



27 mm / 1 inch

LC 750 daN / WLL 750 kg

BS 1500 kg | EN 12195-2

RATCHET BUCKLE OPTIONS



TD2702



TD2703



TD2704



TD2705



TD2706



TD2707

HOOK OPTIONS

A



Hook A

B



Hook B

C



Hook C

D



Hook D

E



Hook E

F



Hook F

PARAMETER SHEET

Item	Ratchet Buckle Type	Load Capacity (LC/WLL)	Breaking Strength (BS)	Standard
TD2701	Moulded rubber handle	750 daN / 750 kg	1500 kg	EN 12195-2
TD2702	Zinc-plated buckle	750 daN / 750 kg	1500 kg	EN 12195-2
TD2703	Black-painted buckle	750 daN / 750 kg	1500 kg	EN 12195-2
TD2704	Zinc-plated buckle	750 daN / 750 kg	1500 kg	EN 12195-2
TD2705	Moulded rubber handle	750 daN / 750 kg	1500 kg	EN 12195-2
TD2706	Zinc-plated buckle	750 daN / 750 kg	1500 kg	EN 12195-2
TD2707	Moulded rubber handle	750 daN / 750 kg	1500 kg	EN 12195-2

Standard configuration: 27 mm polyester webbing. Hook, length, strap color and handle color can be customized.

DURABLE
Polyester webbing

VERSATILE
Multiple buckle & hook options

EASY TO USE
Fast tensioning & release

OEM / ODM
Custom colors & packaging

QUALITY
EN 12195-2 reference

38MM RATCHET TIE DOWN

TD3801



- High-strength polyester webbing
- High-quality hardware
- Easy-to-use
- Customized strap colors
- Designed for cargo restraint applications

38 mm / 1.5 inch

LC 1000 daN / WLL 1000 kg

BS 3000 kg | EN 12195-2

RATCHET BUCKLE OPTIONS



TD3802



TD3803



TD3804



TD3805



TD3806



TD3807



TD3808

HOOK OPTIONS

A



Hook A

B



Hook B

C



Hook C

D



Hook D

E



Hook E

F



Hook F

PARAMETER SHEET

Item	Ratchet Buckle Type	Load Capacity (LC/WLL)	Breaking Strength (BS)	Standard
TD3801	Yellow / white zinc buckle	1000 daN / 1000 kg	2000 kg	EN 12195-2
TD3802	Black-painted buckle	1000 daN / 1000 kg	2000 kg	EN 12195-2
TD3803	Moulded rubber handle	1500 daN / 1500 kg	3000 kg	EN 12195-2
TD3804	Moulded rubber handle	1000 daN / 1000 kg	2000 kg	EN 12195-2
TD3805	Moulded rubber handle	1500 daN / 1500 kg	3000 kg	EN 12195-2
TD3806	Aluminium handle	1500 daN / 1500 kg	3000 kg	EN 12195-2
TD3807	Plastic handle	1500 daN / 1500 kg	3000 kg	EN 12195-2
TD3808	Stainless handle	1500 daN / 1500 kg	3000 kg	EN 12195-2

Standard configuration: 38 mm polyester webbing. Hook, length, strap color and handle color can be customized.

DURABLE
Polyester webbing

VERSATILE
Multiple buckle & hook options

EASY TO USE
Fast tensioning & release

OEM / ODM
Custom colors & packaging

QUALITY
EN 12195-2 reference

50MM RATCHET TIE DOWN

TD5001

- High-strength polyester webbing
- High-quality hardware
- Easy-to-use
- Customized strap colors
- Designed for cargo restraint applications



50 mm / 2 inch

LC 2500 daN / WLL 2500 kg

BS 5000 kg | EN 12195-2

RATCHET BUCKLE OPTIONS


TD5002


TD5003


TD5004


TD5005


TD5006


TD5007


TD5008

HOOK OPTIONS

A 
Hook A

B 
Hook B

C 
Hook C

D 
Hook D

E 
Hook E

F 
Hook F

PARAMETER SHEET

Item	Ratchet Buckle Type	Load Capacity (LC/WLL)	Breaking Strength (BS)	Standard
TD5001	Plastic handle	2500 daN / 2500 kg	5000 kg	EN 12195-2
TD5002	Aluminium handle	2500 daN / 2500 kg	5000 kg	EN 12195-2
TD5003	Moulded yellow rubber handle	2500 daN / 2500 kg	5000 kg	EN 12195-2
TD5004	Moulded yellow rubber handle	2500 daN / 2500 kg	5000 kg	EN 12195-2
TD5005	Red painted buckle	2500 daN / 2500 kg	5000 kg	EN 12195-2
TD5006	Black coated & rubber handle	2500 daN / 2500 kg	5000 kg	EN 12195-2
TD5007	Moulded black rubber handle	2500 daN / 2500 kg	5000 kg	EN 12195-2
TD5008	Aluminium handle	2500 daN / 2500 kg	5000 kg	EN 12195-2

Standard configuration: 50 mm polyester webbing. Hook, length, strap color and handle color can be customized.

DURABLE
Polyester webbing

VERSATILE
Multiple buckle & hook options

EASY TO USE
Fast tensioning & release

OEM / ODM
Custom colors & packaging

QUALITY
EN 12195-2 reference

2" HEAVY-DUTY RATCHET TIE DOWN

USTD5001

- High-strength polyester webbing
- High-quality hardware
- Fast tensioning and release
- Custom strap colors
- Hook and length options



50 mm / 2 inch

WLL 3,333 lb

Assembly BS 10,000 lb WSTDA-T-1

RATCHET BUCKLE OPTIONS



USTD5002



USTD5003



USTD5004

HOOK OPTIONS

A



Hook A

B



Hook B

C



Hook C

D



Hook D

E



Hook E

PARAMETER SHEET

Item	Ratchet Buckle Type	Working Load Limit	Assembly BS	Standard
USTD5001	Aluminum handle	3,333 lb	10,000 lb	WSTDA-T-1
USTD5002	Plastic handle	3,333 lb	10,000 lb	WSTDA-T-1
USTD5003	Molded rubber handle	3,333 lb	10,000 lb	WSTDA-T-1
USTD5004	Molded rubber handle	3,333 lb	10,000 lb	WSTDA-T-1

Standard configuration: 50 mm polyester webbing. Hook, length, strap color and handle color can be customized.

DURABLE
Polyester webbing

VERSATILE
Buckle and hook options

EASY TO USE
Fast tensioning and release

OEM / ODM
Custom colors and packaging

QUALITY
WSTDA-T-1 reference

2" E-TRACK LOGISTIC STRAPS

Ratchet and cam buckle assemblies with spring E-fittings

RATCHET LOGISTIC STRAP WITH SPRING E-FITTINGS

ASSEMBLY BS 4,400 LB / 2,000 KG



FRT-E-50-12Y

Yellow, 12 ft



FRT-E-50-16G

Gray, 16 ft



FRT-E-50-20B

Blue, 20 ft

CAM BUCKLE LOGISTIC STRAP WITH SPRING E-FITTINGS

ASSEMBLY BS 2,500 LB / 1,134 KG



FCB-E-50-12Y

Yellow, 12 ft



FCB-E-50-16G

Gray, 16 ft



FCB-E-50-20B

Blue, 20 ft

PARAMETER SHEET

MODEL	BUCKLE TYPE	WIDTH	COLOR	LENGTH	ASSEMBLY BS
FRT-E-50-12Y	Ratchet buckle	50 mm / 2"	Yellow	12 ft	4,400 lb / 2,000 kg
FRT-E-50-16G	Ratchet buckle	50 mm / 2"	Gray	16 ft	4,400 lb / 2,000 kg
FRT-E-50-20B	Ratchet buckle	50 mm / 2"	Blue	20 ft	4,400 lb / 2,000 kg
FCB-E-50-12Y	Cam buckle	50 mm / 2"	Yellow	12 ft	2,500 lb / 1,134 kg
FCB-E-50-16G	Cam buckle	50 mm / 2"	Gray	16 ft	2,500 lb / 1,134 kg
FCB-E-50-20B	Cam buckle	50 mm / 2"	Blue	20 ft	2,500 lb / 1,134 kg

Model code: FRT = ratchet strap, FCB = cam buckle strap, E = spring E-fitting, 50 = webbing width, final code = length and color.

POLYESTER WEBBING

50 mm / 2" width

SPRING E-FITTINGS

For E-track systems

THREE LENGTHS

12 ft, 16 ft, 20 ft

COLOR OPTIONS

Yellow, gray, blue

OEM / ODM

Custom labels and packaging

Strength ratings shown are for the complete strap assembly. Select tie-downs according to the required working load limit and applicable local regulations.

25MM AUTOMATIC RETRACTABLE TIE DOWN

ATD2503

COMPACT CARGO CONTROL / OEM & PRIVATE LABEL



WEBBING RETRACTS INTO THE HOUSING AFTER USE

25 MM	800 KG	3 M
WEBBING WIDTH	**BREAKING STRENGTH**	**STANDARD LENGTH**
High-strength polyester webbing	Product specification	Up to approx. 3.6 m available

KEY BENEFITS

01 CLEAN STORAGE

Self-retracting webbing keeps storage tidy and easy to handle.

02 FAST SETUP

Pull out only the webbing length needed for the load.

03 EASY TO USE

Quick secure, quick release, with less loose webbing.

HOW TO USE

01



TAKE THE STRAP OUT

Pull the webbing and attach both ends to the anchor points.

02



REMOVE WEBBING SLACK

Activate automatic retraction to remove slack and set the required webbing length.

03



TENSION & LOCK

Move the handle until the desired tension is reached, then lock the ratchet in the safety position.

04



RELEASE & RETRACT

Move the handle to unlock, press the release button, and retract the strap to release the load.

HOOK OPTIONS



Hook style, strap color, label and packaging can be customized for OEM / private label programs.

50MM AUTOMATIC RETRACTABLE TIE DOWN

FINO INDUSTRIES

ATD5003 HEAVY-DUTY CARGO CONTROL / OEM & PRIVATE LABEL



WEBBING RETRACTS AUTOMATICALLY AFTER RELEASE

50 mm / 2 in	3 m / 10 ft	1,000 kg / 2,200 lbs	2,000 kg / 4,400 lbs
WEBBING WIDTH	**NOMINAL LENGTH**	**LASHING CAPACITY (LC)**	**BREAKING STRENGTH (BS)**
Heavy-duty tie-down	Automatic retractable version	Rated load capacity	Complete tie-down assembly

KEY FEATURES

01 AUTOMATIC RETRACTION

Webbing retracts automatically after release.

02 SAFETY LOCK

The lock position keeps the ratchet secured after tensioning.

03 COMPACT STORAGE

Retracted webbing reduces loose strap after use.

HOW TO USE

01



PULL OUT & ATTACH

Pull out the webbing and attach both ends to the anchor points around the load.

02



TENSION THE STRAP

Move the handle up and down until the strap reaches the required tension.

03



ENGAGE SAFETY LOCK

Move the handle into the safety-lock position to secure the ratchet after tensioning.

04



RELEASE & RETRACT

Return the handle, pull the release handle backward, and allow the webbing to retract automatically.

OEM OPTIONS: WEBBING COLOR · LABEL · LOGO · PACKAGING

50MM AUTOMATIC RETRACTABLE TIE DOWN

PUSH-BUTTON DESIGN

FAST OPERATION / OEM & PRIVATE LABEL



PULL OUT, TENSION AND RETRACT WITH LESS SETUP

50 mm / 2 in	**3 m / 10 ft**	**1,000 kg / 2,200 lbs**	**2,000 kg / 4,400 lbs**
WEBBING WIDTH	**NOMINAL LENGTH**	**LASHING CAPACITY (LC)**	**BREAKING STRENGTH (BS)**
Heavy-duty tie-down	Automatic retractable version	Rated load capacity	Complete tie-down assembly

KEY FEATURES

1 PUSH-BUTTON CONTROL

The yellow button controls handle movement and webbing retraction.

2 FAST TENSIONING

Attach both hooks, raise the handle and pump to tension the strap.

3 AUTOMATIC RETRACTION

Return the handle and press the button to retract the webbing.

HOW TO USE

1



PULL OUT & ATTACH

Pull out the webbing and secure both hooks to suitable anchor points.

2



PRESS, RAISE & TENSION

Press the yellow button and raise the handle. Pump the handle up and down to tension the webbing and secure the load.

3



RESET & RETRACT

When finished, press the yellow button and return the handle to its original position. Press the button again to retract the webbing.

OEM OPTIONS: WEBBING COLOR · LABEL · LOGO · PACKAGING

FINO
INDUSTRIES

BUILT AROUND YOUR RANGE

Choose the right configuration for your market, including strap type, hardware, length, color and retail packaging.

CONTACT

Dora | FINO INDUSTRIES

CEL/WhatsApp +86 131 5746 6703

Email dora@finoindustries.com

Web: www.finoindustries.com

Testing can be arranged according to customer and market requirements.

